



μ' (μ'')-Frequency

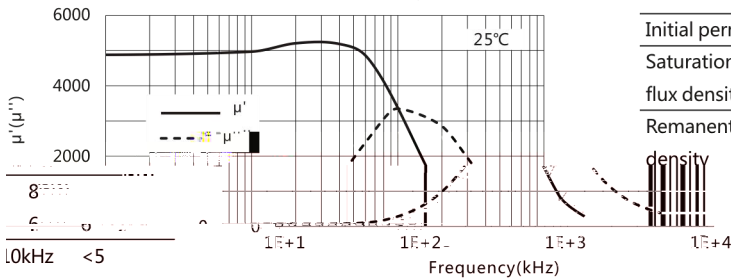

Initial permeability	μ_i	25°C	4000±25%
Saturation magnetic flux density	B_s (mT)	25°C	430
flux density		100°C	270
Remanent flux density	B_r (mT)	25°C	80
		100°C	70
Coercivity	H_c (A/m)	25°C	
		100°C	

10kHz <5
Relative loss factor $\tan\delta/\mu_i$ 25°C 1

μ_i -Temperature

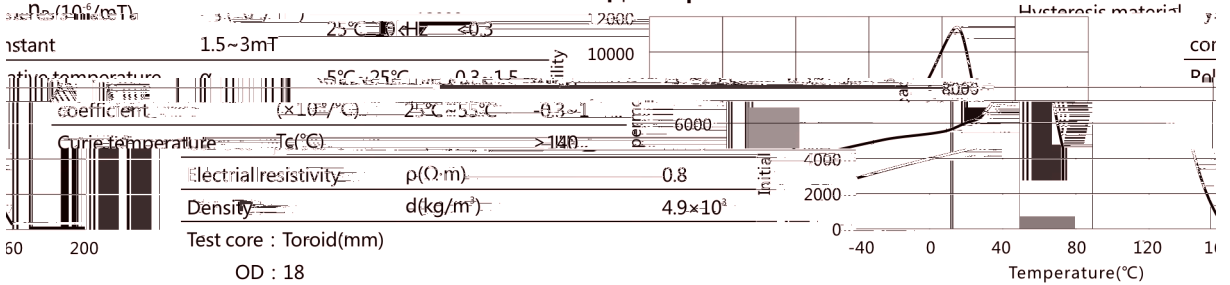

Electrical resistivity	ρ ($\Omega\cdot m$)	0.8
Density	d (kg/m^3)	4.9×10^3



Test core : Toroid(mm)

OD : 18

ID : 8

H : 5

$\tan\delta/\mu_i$ -Frequency

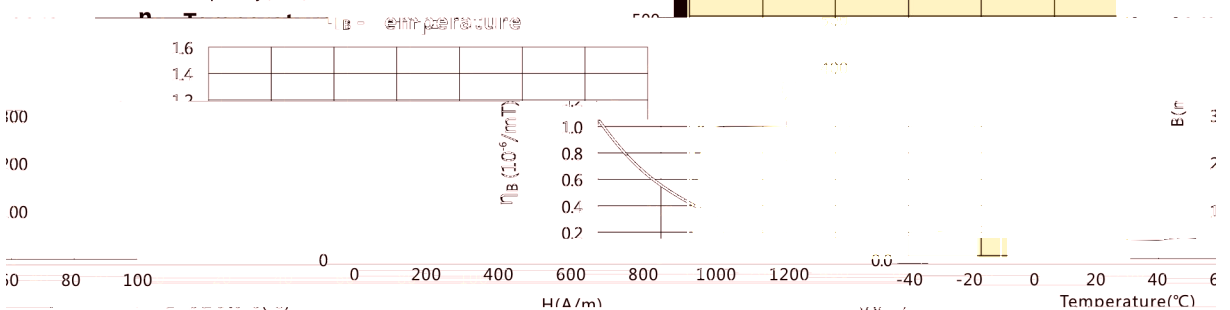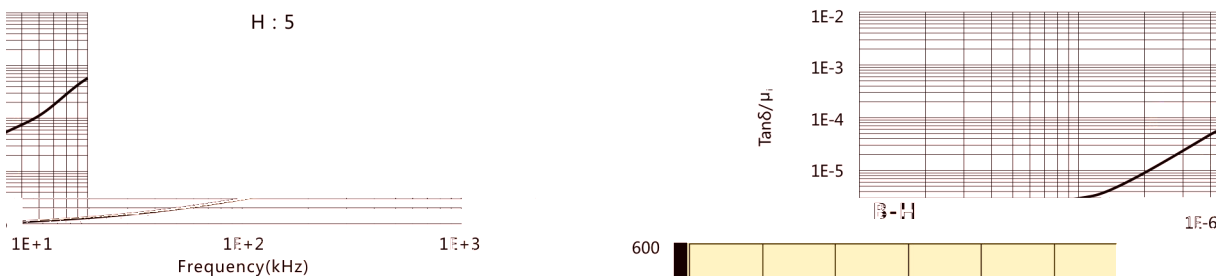

Temperature (°C)