



μ' (μ'')-Frequency

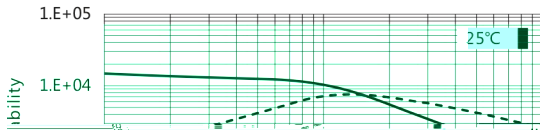


Initial permeability	μ_i	25°C	15000±30%
Saturation magnetic flux density	Bs(mT)	25°C	360
	1194A/m		

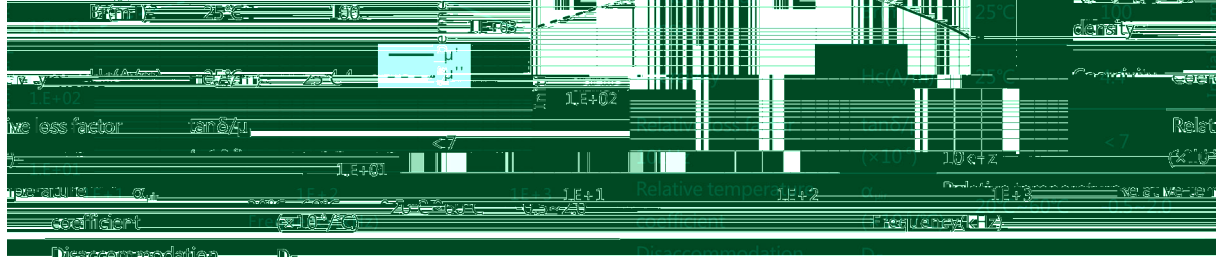


Disaccommodation factor D_p 1~10min <2.0

μ_r -Temperature

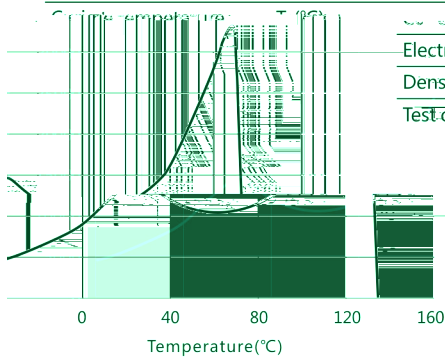


Electrical resistivity	$\rho(\Omega\cdot m)$	0.15	30000
Density	$d(kg/m^3)$	4.95×10^3	25000
Test core: Toroid(mm)			
	OD: 18		
	ID: 8		
	H: 5		

$\tan\delta/\mu_i$ -Frequency

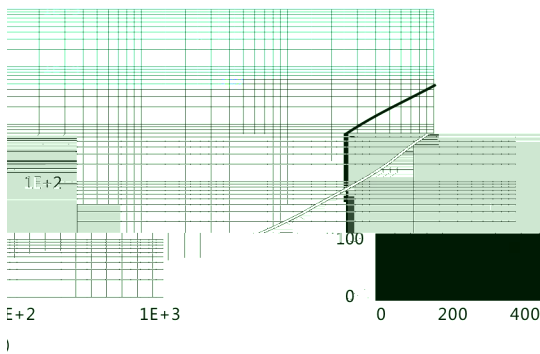


B-H

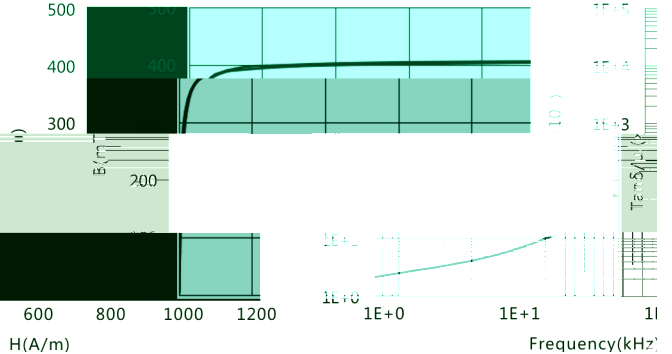

Frequency(kHz)

Z-Frequency

N=10TS, Φ 0.35mm, T=25°C

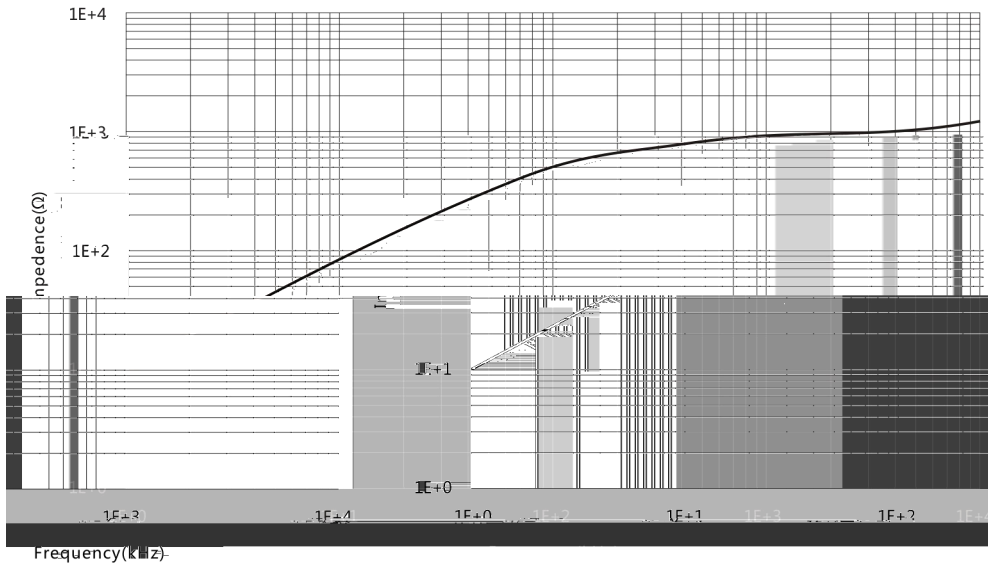

Bs-Temperature

H=1194A/m

