


Bs-Temperature

H=1194A/m

flux density	1194A/m	100°C	450
Remanence	Br(mT)	25°C	180
		100°C	70
Coercivity	Hc(A/m)	25°C	14
		100°C	7
Core loss	Pcv(kW/m ³)	25°C	700
	100kHz 200mT	100°C	320
Electrical resistivity	ρ(Ω·m)		
Density	d(kg/m ³)		

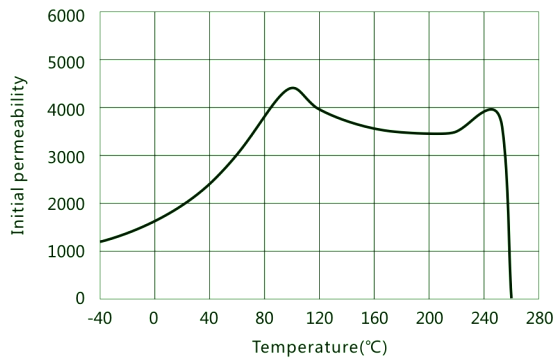

test core : Ferrite
 OD : 25
 ID : 15
 H : 7.5

B-H

μ_i-Frequency

E

