



Complex permeability vs.Frequency

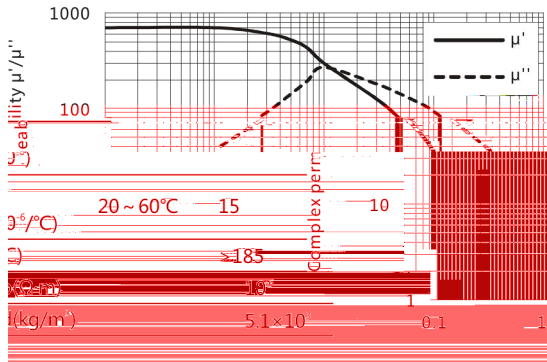


Initial permeability	μ_i	25°C	650±20%
Saturation magnetic flux density	B_s (mT)	25°C	400

Relative loss factor	$\tan \delta$	25°C	≤15
Relative temperature coefficient	α_{μ}	(%)	≤10
Curie-temperature	T_c (°C)		≥185
Electrical resistivity	ρ (Ω·cm)		≥10 ¹⁰


Relative loss factor vs.Frequency

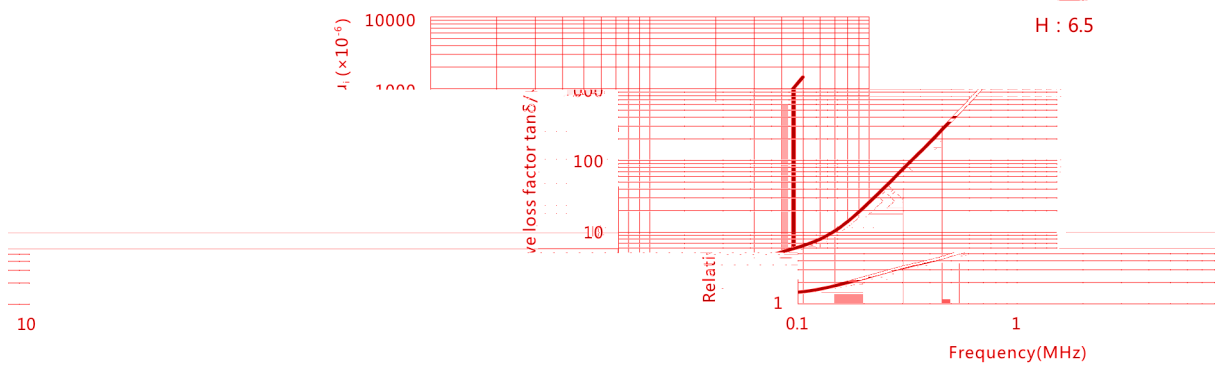

Flux density vs. Temperature

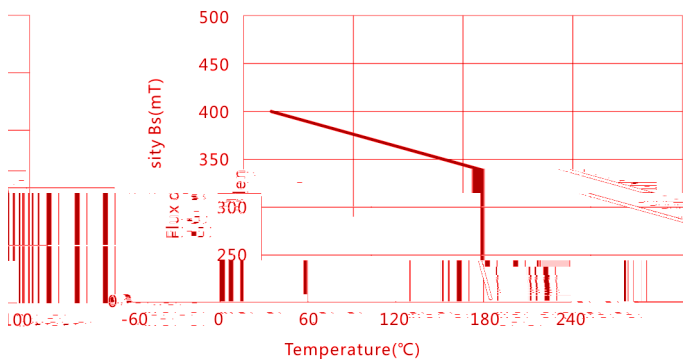

Initial permeability vs. Temperature

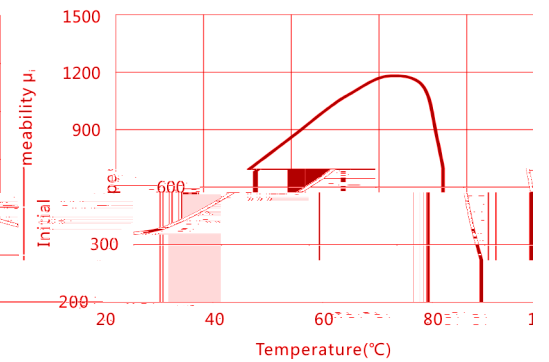

Additional parameters: Density: 5.1 × 10⁻⁶ kg/m³; Test core: Toroid (mm); OD: 12.7; ID: 7.9; H: 6.5